




S 51+50 K312T+F+PS

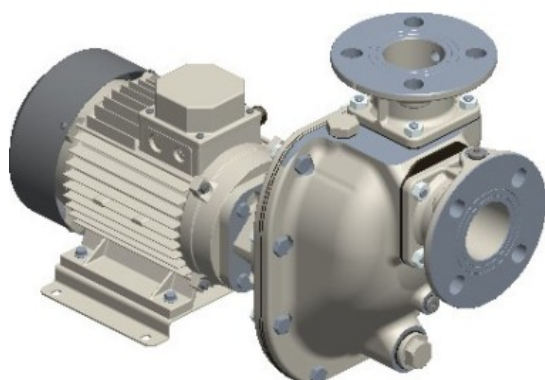

Product codes:

Reference: 2503.03

Product short description:

2" Self-priming centrifugal pump in stainless steel with mechanical seal, grease-lubricated, non return valve and 2,2 kW electric motor close coupled
+F flange coupling according DIN. PN16
+PS automatic lubricator for mechanical seal

Product features:

Main Features
Pump series: S 51+50
Pump Flow Rate: max 40 m ³ /h (655 l/min)
Pump head with 50 Hz grid frequency: max 16 m
Max. Solids Handling: 25 mm
Self-priming: ★★☆☆☆
Heavy-duty: ★★★★★
Construction: Close Coupled
Pump
Type of Pump: Self-priming centrifugal pump
Suction port: DN50
Discharge port: DN50
Type of ports: DIN PN16 flange (compatible), ANSI 150lb flange
Type of self-priming: Wet-prime







Filling port: Yes
Drain Port: Yes
Plug for Vacumeter: Yes
Plug for the Manometer: Yes
Material of casing: Stainless steel
Material of impeller: Stainless steel
Material of wear plate: Stainless steel
Material of shaft: Stainless steel AISI316
Material of non-return valve: FKM (Viton)
Shaft sealing: YCV Mechanical Seal with Grease Lubrication in SiC/SiO ₂ /FKM (Viton®) on Stainless Steel Sleeve
Drive
Type of drive unit: Three-Phase Electric Motor
Drive Manufacturer: Victor Pumps
Efficiency class: IE2, S6-75%, (IE3 on request)
Rated Power: 2, 2 kW
Maximal Rotation: 2900 rpm (50 Hz)
Rated voltage: 400 V ±10% @ 50 Hz, 230 V ±10% @ 50 Hz
Protection: 7 Amp (380-480 V), 10 Amp (220-277 V)
Cooling method: IC411- TEFC
Protection degree: IP55
Insulation class: F
Performance data
Typical application: waste water with solids in suspension, non-corrosive
Product temperature: max. 60 °C
Ambient temperature: max. 40 °C
Density: up to 1, 1 kg/dm ³ , for higher values you need an oversized motor
Viscosity: up to 30 mm ² s (cSt), for higher values you need an oversized motor
Max vacuum with water: max 8 m (9, 5 m for 10 min)
Max vacuum with air: max 7, 5 m
Additional Features
Setup position: Horizontal
Coupling: One shaft solution without any coupling
Paint: RAL6011 Reseda green
External Dimensions (L x W x H): see dimensions
Net Weight: see dimensions

Product gallery:

S 51 - 50 Hz

Laufzeit	Feststufte bis	Umdrehung
Imperial 8 7/8 mm	Seals up to	Speed - 2000 mm-t
Chinese	Seals/Inches	Valve

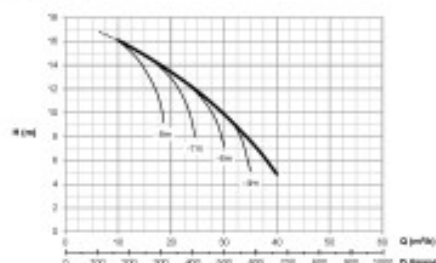


© 2004 Blackwell Publishing Ltd, *Journal of Internal Medicine* 255: 103–110

www.scripps.edu

© 2004 Blackwell Publishing Ltd

© 2000 Blackwell Science Ltd *Journal of Internal Medicine* 247: 395–401

[illegible]
$$k_g = 56$$

$$r^2 = 0.13$$


avg = 0.0

