




S 65 G31T

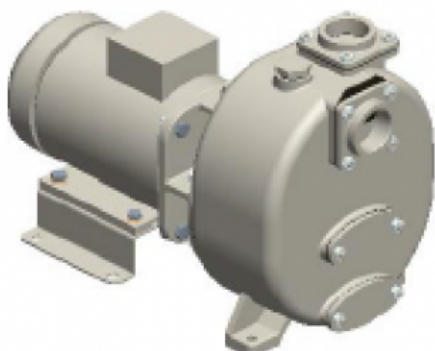

Product codes:

Reference: 14191

Product short description:

2" Self-priming centrifugal pump in cast iron with mechanical seal, grease-lubricated, non return valve and 2,2 kW electric motor close coupled

Product features:

Main Features
Pump series: S 65
Pump Flow Rate: max 40 m ³ /h (655 l/min)
Pump head with 50 Hz grid frequency: max 13 m
Max. Solids Handling: 25 mm
Self-priming: ★★☆☆☆
Heavy-duty: ★★★★★
Construction: Close Coupled
Pump
Type of Pump: Self-priming centrifugal pump
Suction port: 2"
Discharge port: 2"
Type of ports: Female Thread BSP
Type of self-priming: Wet-prime
Inspection cover for the impeller: Yes
Filling port: Yes




Drain Port: Yes
Plug for Vacuometer: Option
Plug for the Manometer: Option
Material of casing: Cast iron
Material of impeller: Cast iron
Material of wear plate: Steel
Material of shaft: Stainless steel AISI316
Material of non-return valve: NBR (Nitrile)
Shaft sealing: YCV Mechanical Seal with Grease Lubrication in SiC/SiO ₂ /FKM (Viton®) on Stainless Steel Sleeve
Drive
Type of drive unit: Three-Phase Electric Motor
Drive Manufacturer: Victor Pumps
Efficiency class: IE3
Rated Power: 2, 2 kW
Maximal Rotation: 1450 rpm (50 Hz)
Rated voltage: 400 V ±10% @ 50 Hz, 230 V ±10% @ 50 Hz
Protection: 7 Amp (380-480 V), 10 Amp (220-277 V)
Cooling method: IC411- TEFC
Protection degree: IP55
Insulation class: F
Performance data
Typical application: waste water with solids in suspension, non-corrosive
Product temperature: max. 60 °C
Ambient temperature: max. 40 °C
Density: up to 1, 1 kg/dm ³ , for higher values you need an oversized motor
Viscosity: up to 5 mm ² s (cSt), for higher values you need an oversized motor
Max vacuum with water: max 8 m (9, 5 m for 10 min)
Max vacuum with air: max 6 m
Additional Features
Setup position: Horizontal
Coupling: One shaft solution without any coupling
Paint: RAL6011 Reseda green
External Dimensions (L x W x H): 592 x 309 x 396 mm
Net Weight: 79 kg

Product gallery:



S 65 - 50 Hz

Laufzeit:	320 mm Ø	Fräskorona (St)	28 mm Ø	Umdrehung:	1400 min ⁻¹
Impeller:		Solids up to:		Speed:	
Gehäuse:		Solid flow to:		Velocity:	


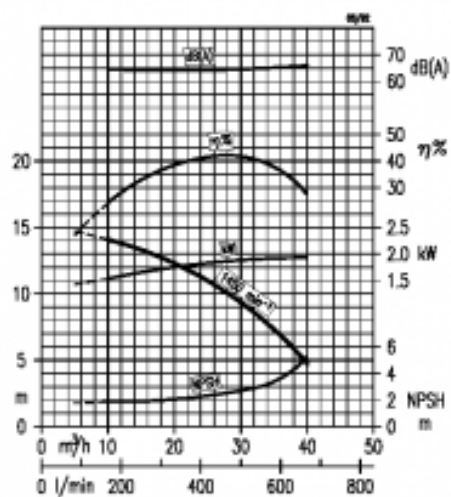


— www.cfdm.com

865..T


$$\begin{aligned} \hat{\mu}_Y &= 95 \\ \hat{\sigma}_Y^2 &= 0.19 \end{aligned}$$


log = 70



— www.irs.gov/efile