




S100 G12ZH

Lauftrad:
Impeller: 158 mm Ø
Girante:

Feststoffe bis:
Solids up to: 37 mm Ø
Solidi fino a:

Umdrehung:
Speed: ≈ 3000 min⁻¹
Velocità:

T1510012 158 -> 158mm; 2950 -> 3000rpm

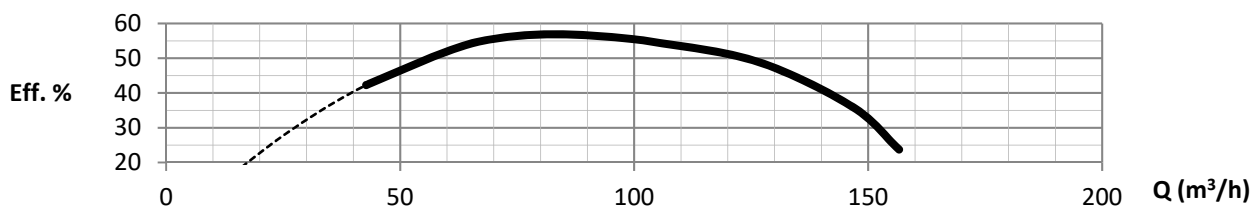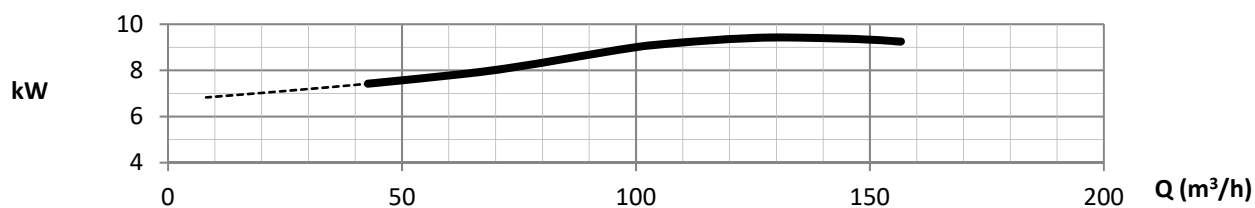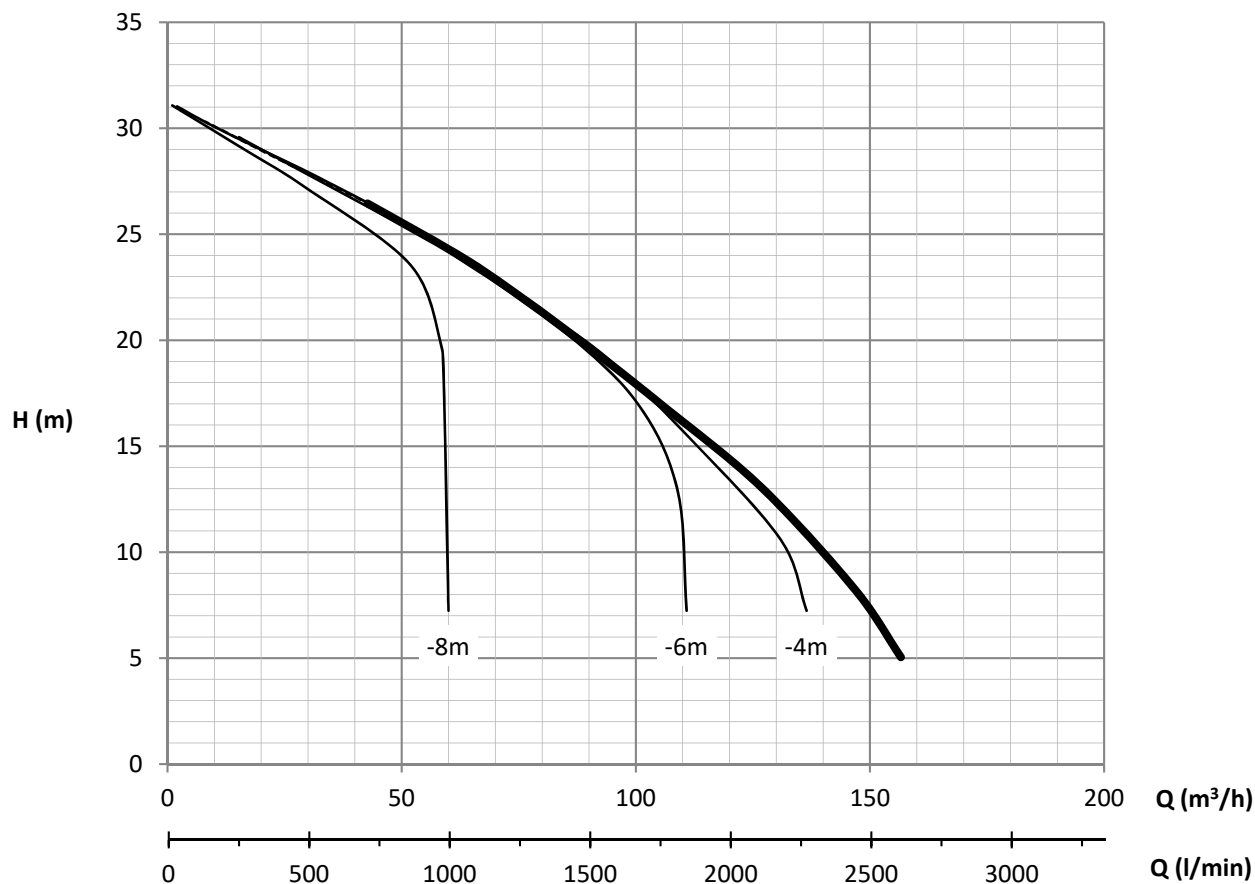

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $\nu = 1 \text{ mm}^2/\text{s}$, calculated

DN100

0 1 2 3 4 5 6 7 m/s