





S 80+60 - 3300rpm

Laufrad:
Impeller: Ø 138 mm
Girante:

Feststoffe bis:
Solids up to: Ø 32 mm
Solidi fino a:

Umdrehung:
Speed: ~ 3300 min⁻¹
Velocità:

T1905291 138 -> 138mm; 2935 -> 3300rpm

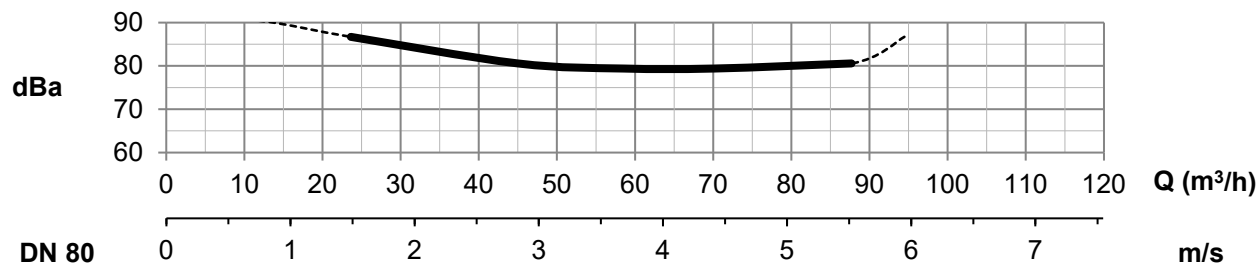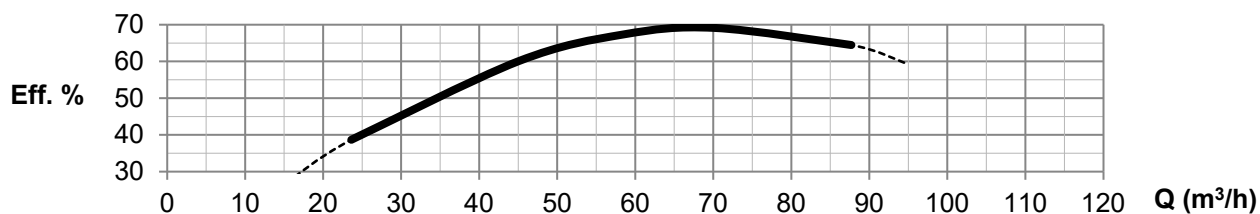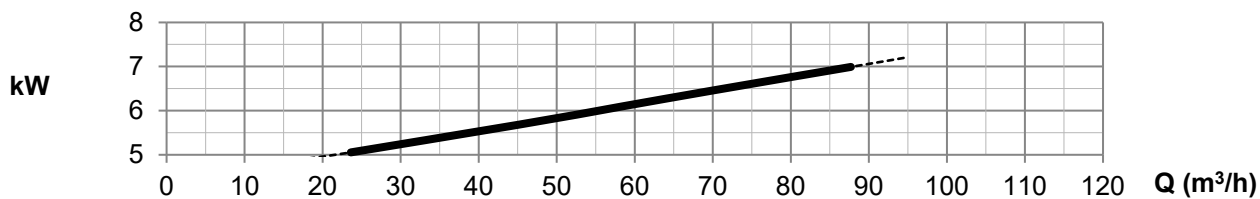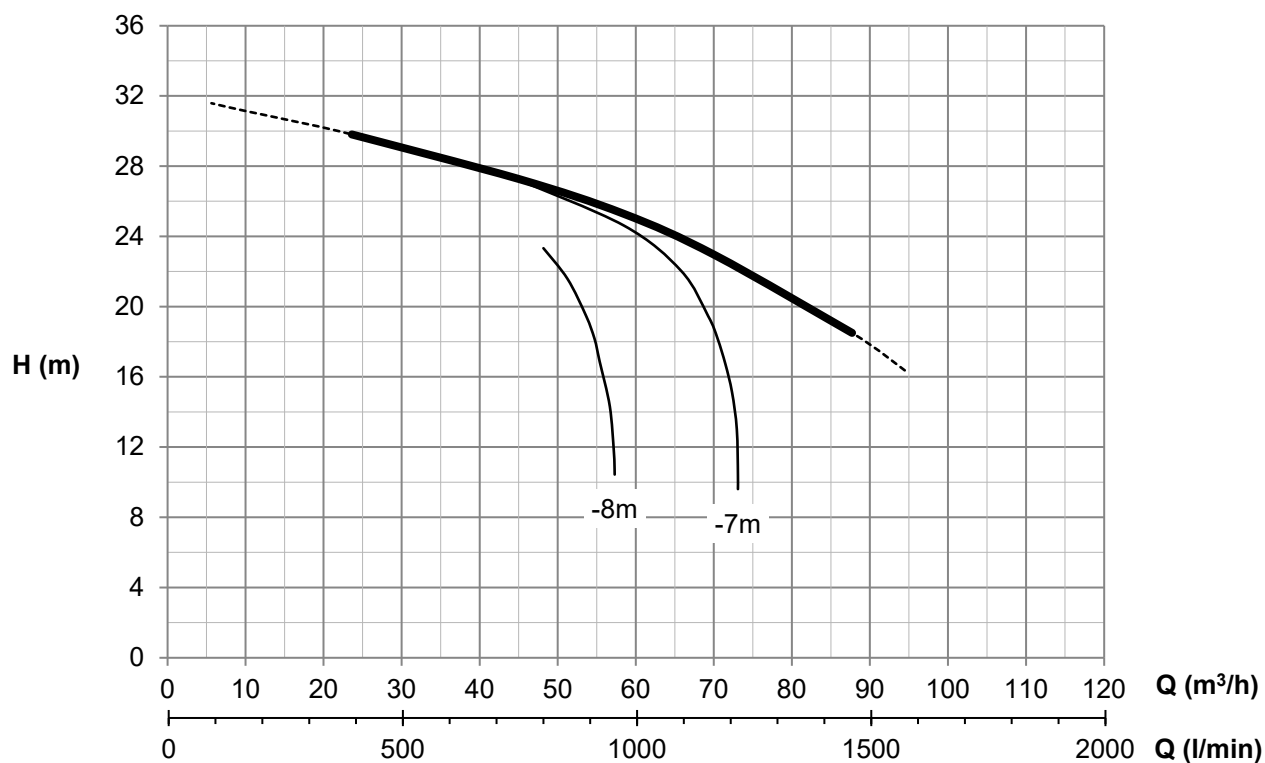

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $v = 1 \text{ mm}^2/\text{s}$, calculated

DN 80