

S161+30 - 50 Hz

Lauftrad:

Impeller: Ø 278 mm

Girante:

U2505131 278 -> 278mm; 1455 -> 1455rpm

Feststoffe bis:

Solids up to: Ø 47 mm





Solidi fino a:

Umdrehung:

Speed:

Velocità:

~ 1455 min-1

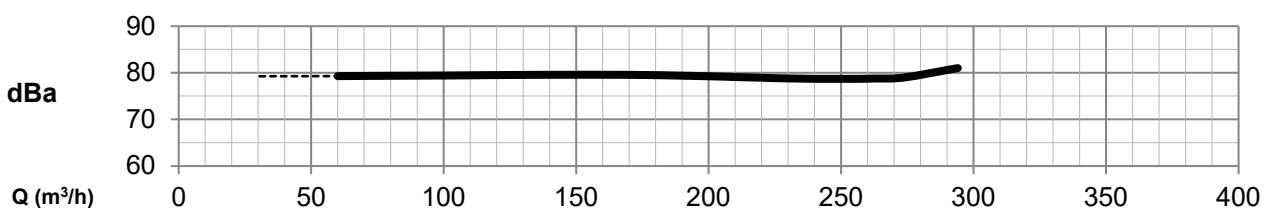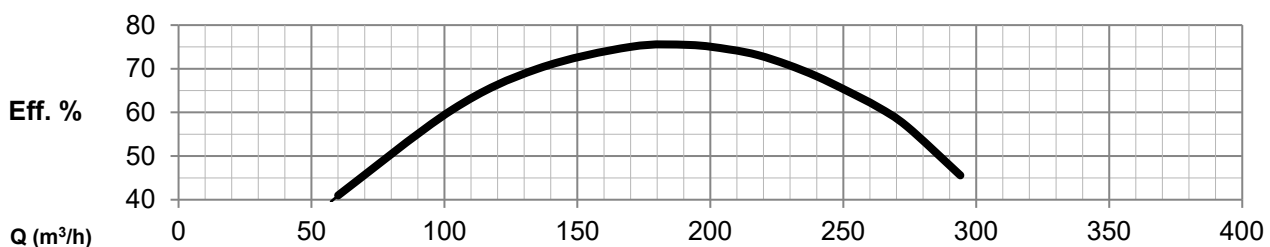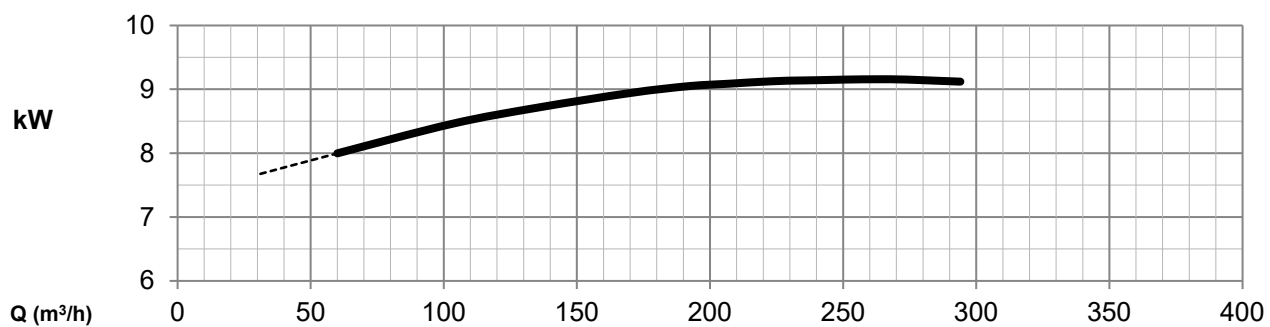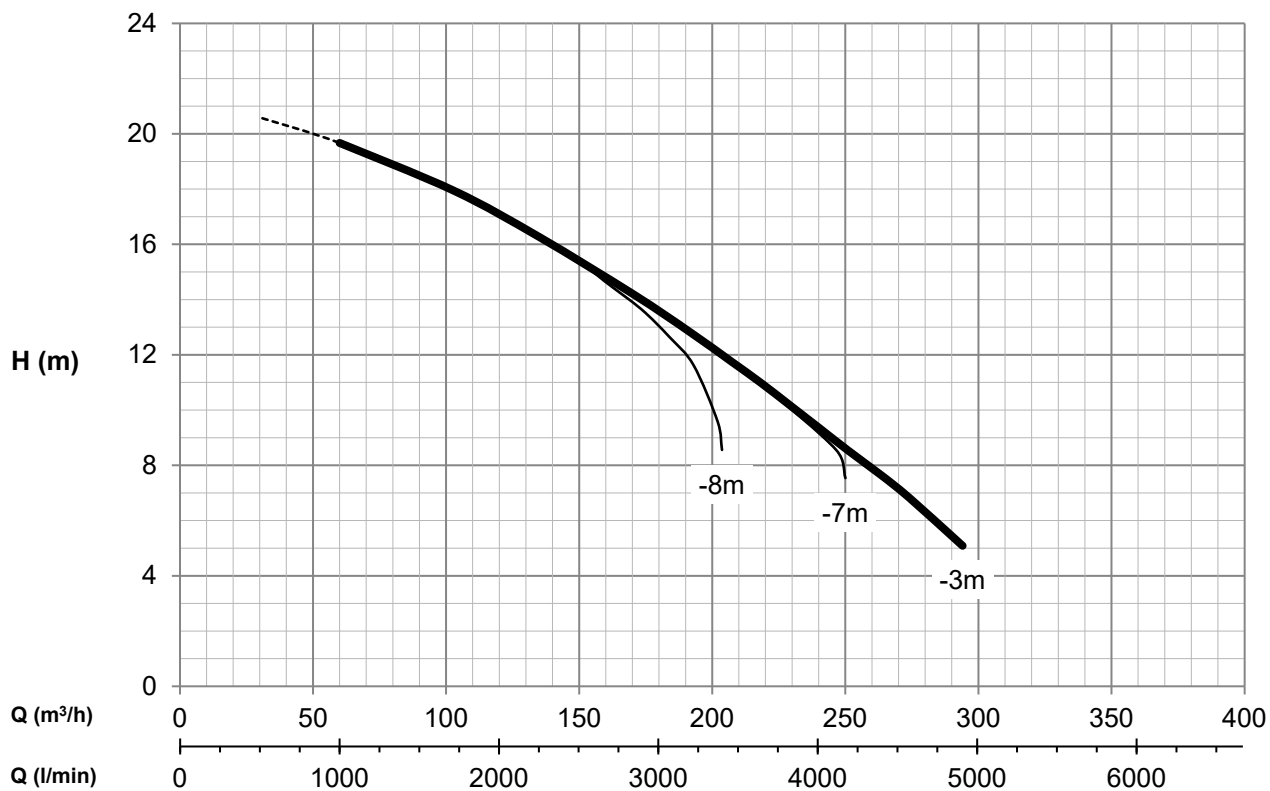

m/s
DN150

0 1 2 3 4 5 6