







S105 - 50 Hz

Laufrad:
 Impeller: Ø 218 mm
 Girante:

Feststoffe bis:
 Solids up to: Ø 45 mm
 Solidi fino a:

Umdrehung:
 Speed: ~ 1460 min-1
 Velocità:

T1703041 218 -> 218mm; 1460 -> 1460rpm

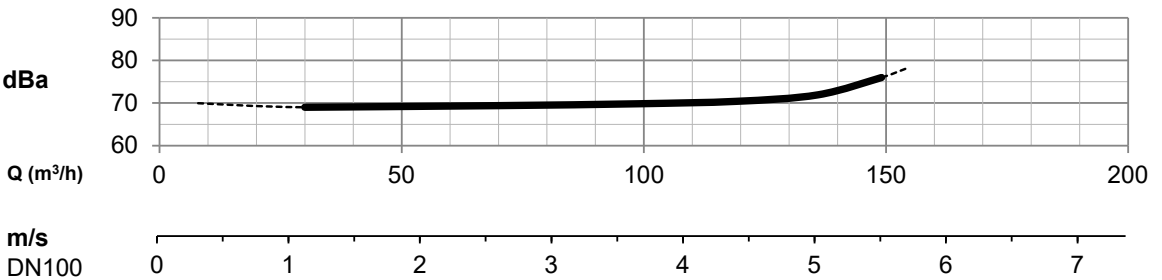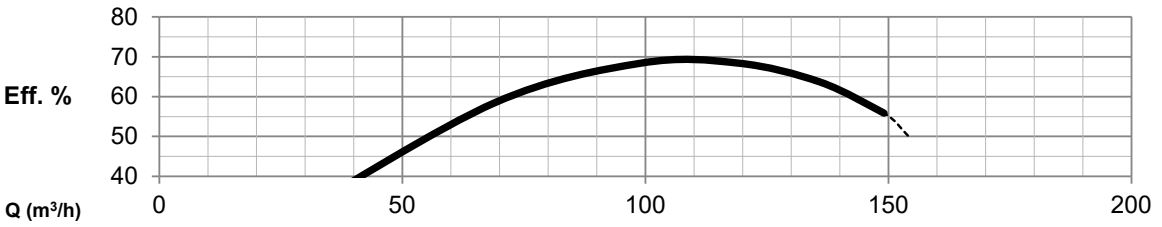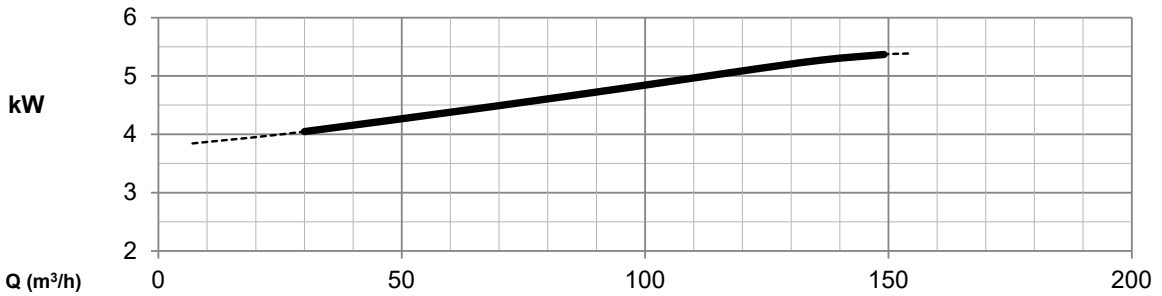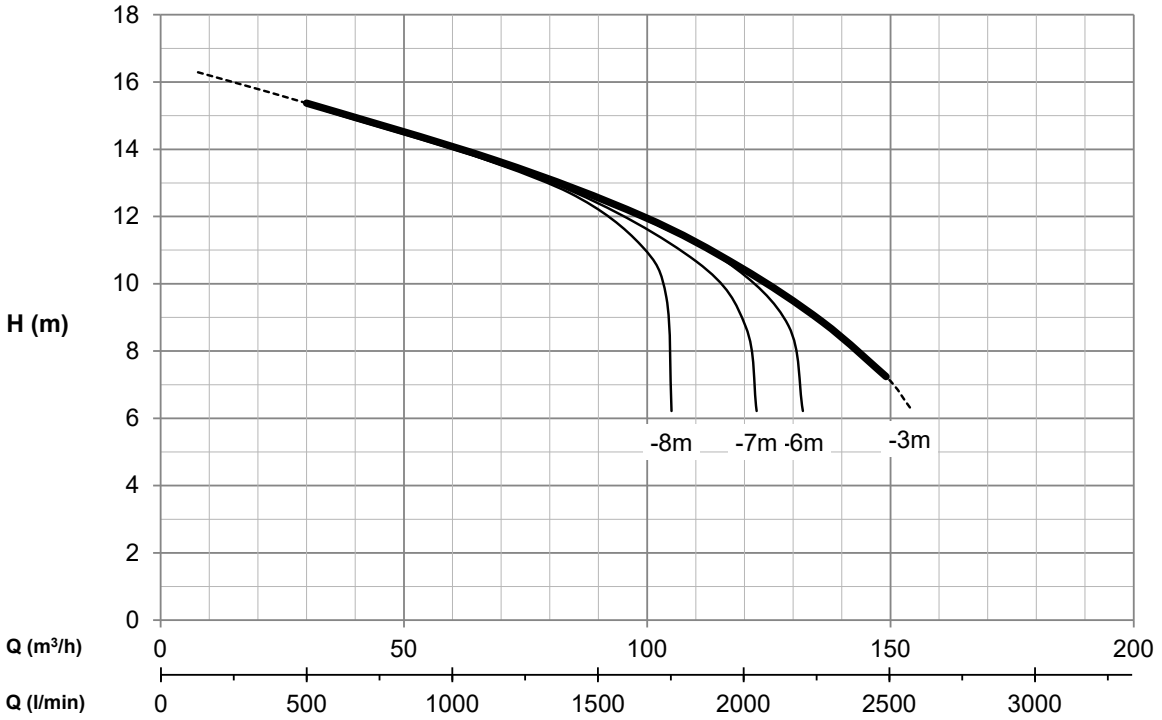

ISO 9906:2012 - GRADE 3B, p = 1 kg/dm³, v = 1 mm²/s