

S 68 - 50 Hz

Lauftrad:

Impeller: Ø 208 mm

Girante:

U2410011 208 -> 208mm; 2962 -> 2962rpm

Feststoffe bis:

Solids up to: Ø 25 mm





Solidi fino a:

Umdrehung:

Speed:

Velocità:

~ 2962 min-1

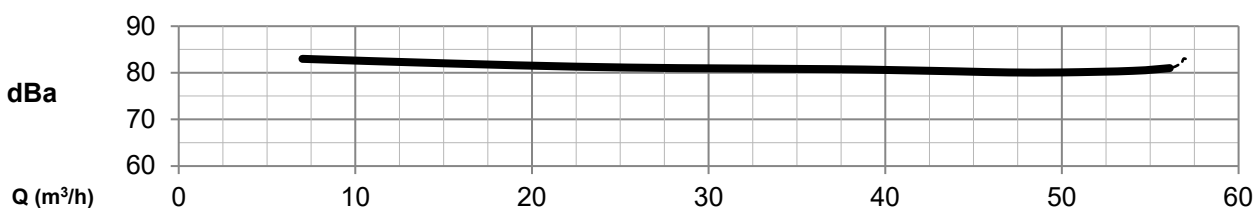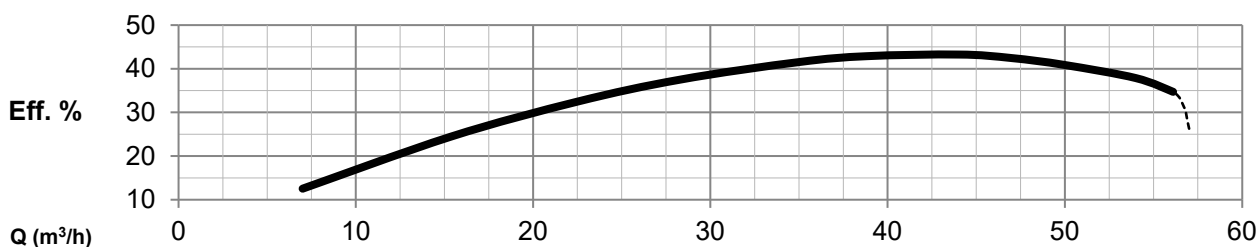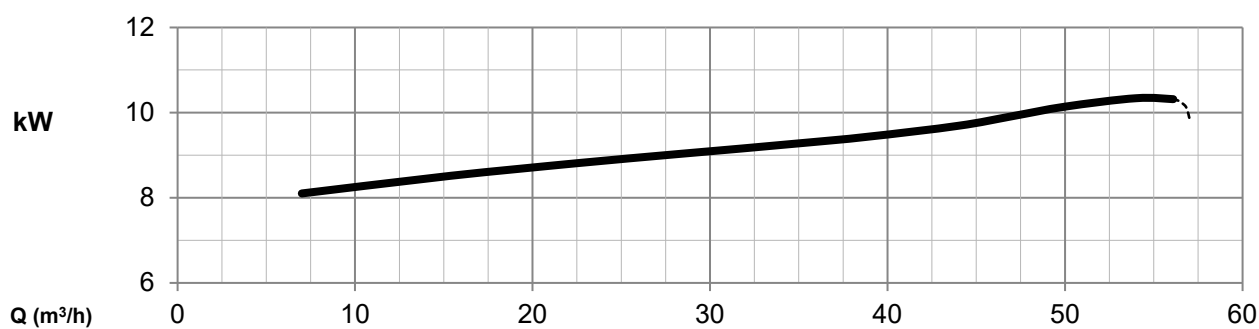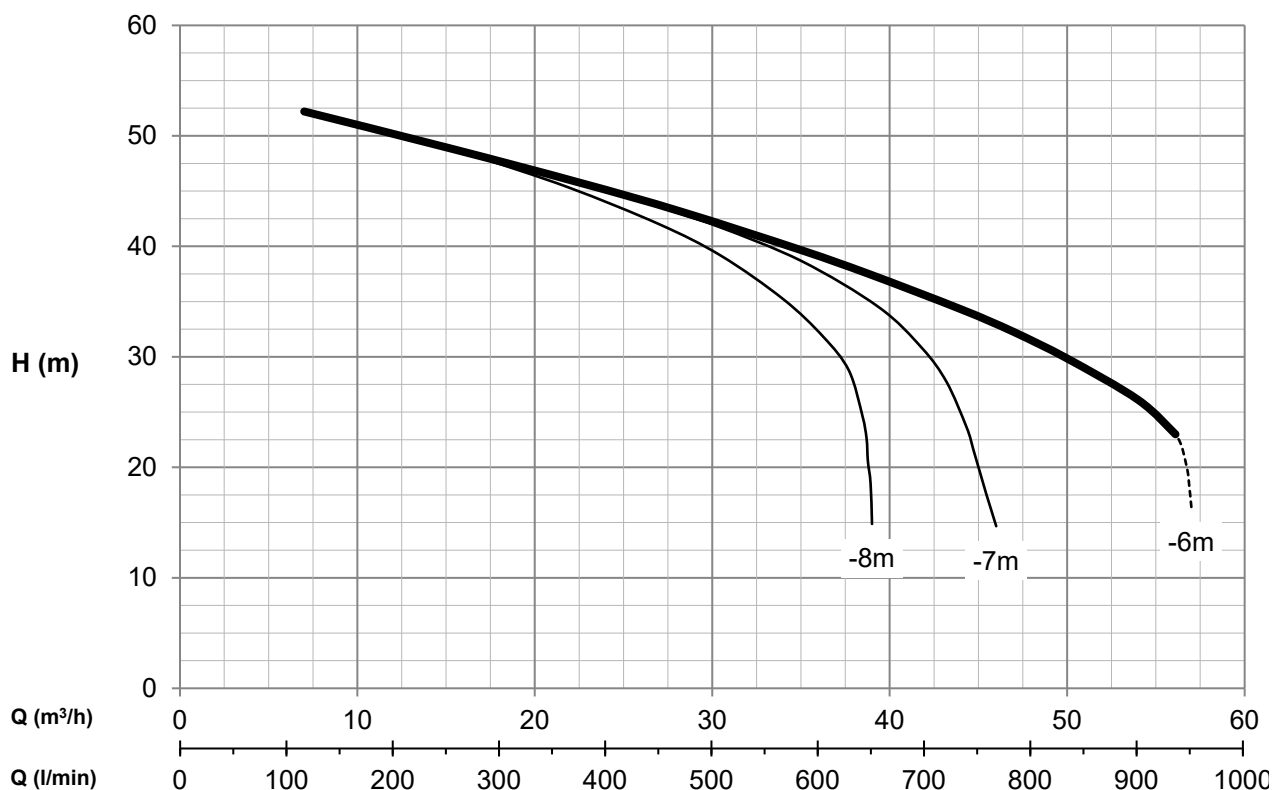

m/s
DN 50

0 1 2 3 4 5 6 7 8 9